



we think transport


BPW Turntables with double ball race

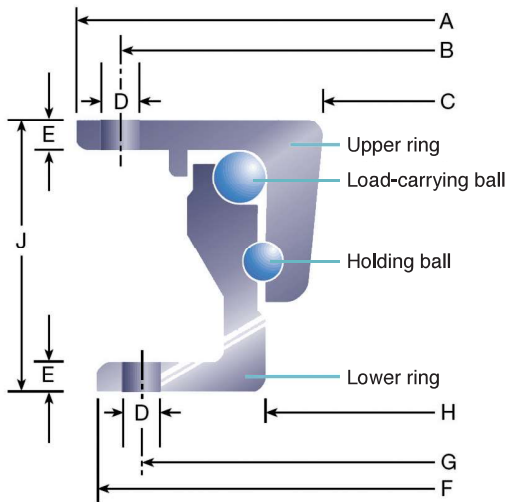


8-hole
DK 80/8




8-hole



10-hole
DK 80/16A



12-hole



BPW Turntables -drilled?					Upper Ring				Lower Ring				Bolt per ring						
Model	BPW Code Number	Permitted axial load (in t ¹)	Permitted total trailer weight t	External Ø A mm	Pitch Circle Ø B mm	Hole pattern	Internal Ø C mm	Hole Ø D mm	Flange thickness E mm	External Ø F mm	Pitch circle Ø G mm	Hole pattern	Internal Ø H mm	Hole Ø D mm	Flange thickness E mm	Quantity	Tread Ø mm	Design height J min.	Weight (kg)
DK 80/8	02.6415.10.00	8	40	894	866	①	749.5	16	9	880	852	②	784	16	9	8	M 14	80	49
DK 80/10	02.6415.13.00	10	50	1108	1074	③	959.5	16	9	1095	1060	④	994	16	9	8	M 14	80	64
DK 90/13	02.6415.20.00	13	55	1108	1074	⑤	942	18	10	1095	1060	⑥	979	18	10	8	M 16	90	82
DK 90/14	02.6415.34.00	14	55	1000	966	⑦	834	18	10	987	952	⑧	871	18	10	8	M 16	90	72
DK 90/16	02.6415.30.00	16	60	1108	1074	⑨	942	18	10	1095	1060	⑩	979	18	10	8	M 16	90	82
DK 90/20	02.6415.41.0	20	60	1108	1074	⑪	942	18	10	1095	1060	⑫	979	18	10	8	M 16	90	82
DK 90/20/1212	02.6415.76.00	20	60	120/8	1174	⑬	1042	18	10	1195	1160	⑭	1079	18	10	12	M 16	90	85
DK 90/26/1212	02.6415.78.00	26	70	1208	1174	⑮	1042	18	10	1195	1160	⑯	1079	18	10	12	M 16	90	96
DK90/30/1212 SP	02.6415.80.00	30	70	1208	1174	⑰	1042	18	10	1195	1160	⑱	1079	18	10	12	M 16	90	96

BPW Turntables -undrilled

DK 80/5	02.6415.06.00	5	25	664	636		519.5	14	9	650	622		554	14	9	8	M 12	80	38
---------	---------------	---	----	-----	-----	--	-------	----	---	-----	-----	--	-----	----	---	---	------	----	----

1) Special versions on request. 2) Undrilled options available on request. 3) See illustrations for drilling patterns. 4) Only use for semi-trailer coupling. 5) Permitted axial load = static axial load over the steered axle which acts on the turntable. Subject to modifications!